



Technical data

Date	9/23/2025
Offer N.	---
Pump Type	P 7SL_SLX-550/10T




Client	EES GmbH	Reference	---
--------	----------	-----------	-----

Pump data

Pump body	Cast iron (model SL); Stainless steel AISI 304 (model SLX)	Vertical Multistage centrifugal pumps in ANSI 304 stainless steel. Ideal for non-loaded fluid pumping; pressurisation systems; irrigation; drinking or glycol water; water treatment; food industry; heating and air conditioning; washing systems. These pumps are available with overlapping or in-line deliveries and in threaded or flanged versions.
Motor bracket	Cast iron	
External shell, shaft	Stainless steel AISI 304 EN X5CrNi18-10	
Impeller	Stainless steel AISI 304 EN X5CrNi18-10	
Mechanical seal	Ceramic-graphite ≤ 6 impeller; Graphite-silicon carbide ≥ 7 impeller	
Intermediate shaft guiding stage bush	Ceramic-tungsten carbide	
Pump body gasket	EPDM	
Operating pressure	Max 8 bar ≤ 6 impellers Max 14 bar ≥ 7 impellers	
Liquid temperature	-15°C +110°C	
Ambient temperature	Max 40°C	

P2		P1 (kW)		A		Q (m3/h - l/min)						
(HP)	(kW)	1~	3~	1~ 1x230V	3~ 3x400V	0	2.4	3.6	4.8	6	7.2	9.6
						0	40	60	80	100	120	160
						H (m)						
5.5	4	---	4.1	---	7.9	119.8	119.6	118.4	113.9	107.7	99.4	70.4

Technical Sheet

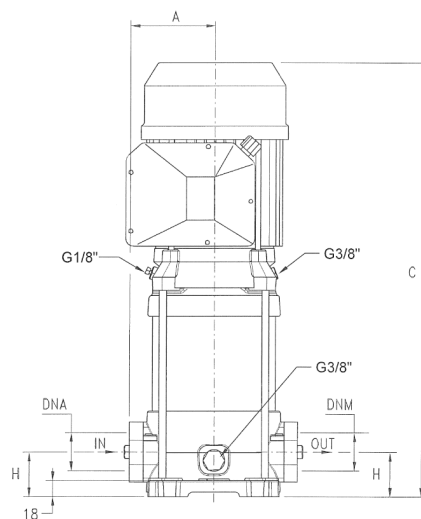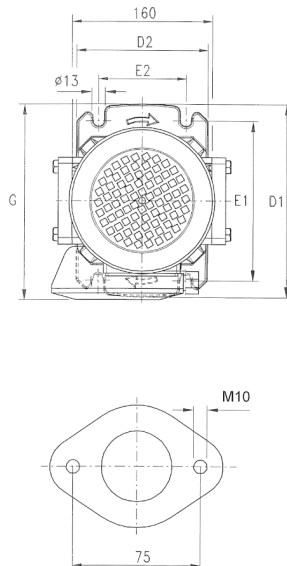

DIMENSIONS (mm)								Kg		DNA	DNM
A	C	D1	D2	E1	E2	G	H	SL	SLX		
98	692	220	150	180	100	251	50	46,5	45	1"1/4G	1"1/4G

Notes

The information may be subject to change without notice. It is always advisable to contact our commercial department in order to get further information about the products, their technical specifications and warranty conditions. The Company is expressly relieved of any liability for the purchasing of a product not in line with the customer's needs, if not consulted beforehand for a specific consultancy.



Working Curves

Pump type: P 7SL_SLX-550/10T




Curv n°:

P 7SL_SLX-550/10T

Date:

9/23/2025

Q (l/min) 150 | H (m) 71 | Power [kW] - | Efficiency % 52.55 | NPSH (m) 5.09

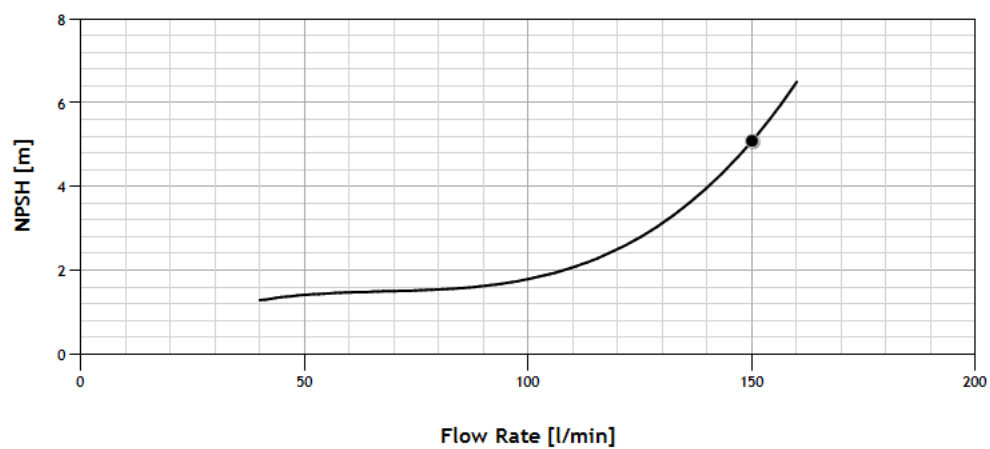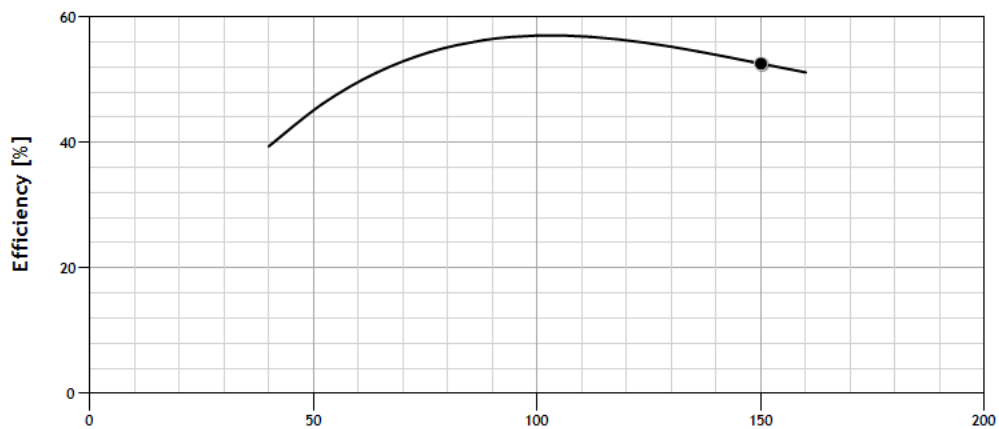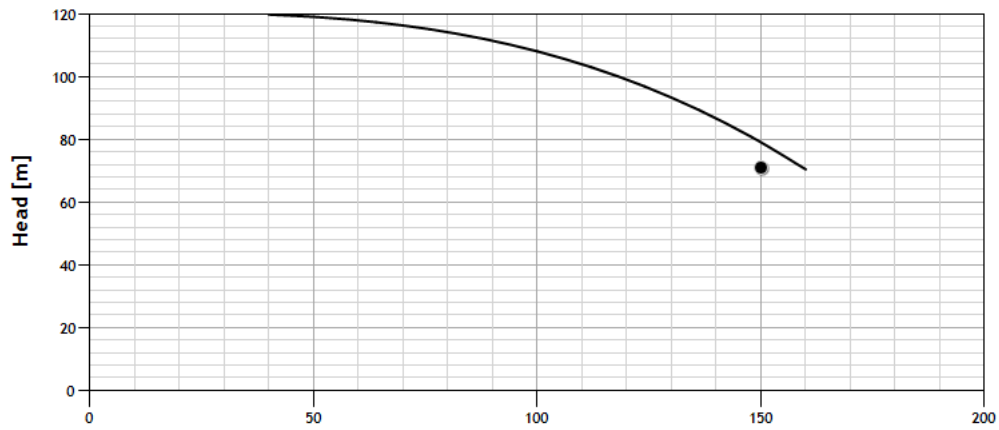

MEI ≥ 0.4 (regulation EU N. 547/2012)
Tolerances according to UNI ISO 9906 grade 3B